

STAINLESS STEEL

TOP QUALITY

RUST
DOESN'T
STAND A
CHANCE



Features

- Stainless steel.
- Quick lock attachment.
- Optimum corrosion protection.

Benefits

- No risk of external rust.
- External rust on stainless steel is the result of abrasion when tightening screws using ordinary steel tools. The material which wears off such tools comprises steel particles which adhere to the screws and are transformed, in the presence of oxygen, into rust. The use of stainless steel bits prevents the formation of external rust on stainless steel screws or stainless steel surfaces.
- Quick lock attachment for optimum holding in the chuck.
 - Fully compatible with PZ, PH, T, SL type screw.



ZERO RUST



1/4" DIN 3126 C 6,3

LENGTH: 25 mm

DIN 3126 C 6,3




PHILLIPS - DIN 5260

Taille	Lg	Ref.	Gencod	Pack
5 PIECES				
PH1	25	UUSE0062041N	4013769437969	A
PH2	25	UUSE0062042N	4013769437976	A
PH3	25	UUSE0062044N	4013769437983	A



POZIDRIV - DIN 5260

Taille	Lg	Ref.	Gencod	Pack
5 PIECES				
PZ1	25	UUSE0062060N	4013769437938	A
PZ2	25	UUSE0062061N	4013769437945	A
PZ3	25	UUSE0062062N	4013769437952	A

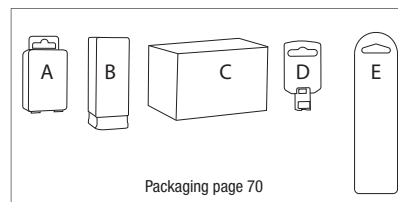

Packaging page 70



TORX®

Taille	Lg	Ref.	Gencod	Pack
5 PIECES				
T10	25	UUSE0062093N	4013769437990	A
T15	25	UUSE0062094N	4013769440037	A
T20	25	UUSE0062095N	4013769440044	A
T25	25	UUSE0062096N	4013769440051	A
T30	25	UUSE0062098N	4013769440068	A
T40	25	UUSE0062099N	4013769440075	A



SLOT - DIN 3127

Taille	Lg	Ref.	Gencod	Pack
5 PIECES				
SLO,8x4	25	UUSE0612004N	4013769440082	A
SLO,8x5	25	UUSE0062002N	4013769440099	A
SLO,8x5,5	25	UUSE0612005N	4013769440105	A
SL1,2x6,5	25	UUSE0612007N	4013769440112	A

